


D.0027450002

Operating instructions (Translation)

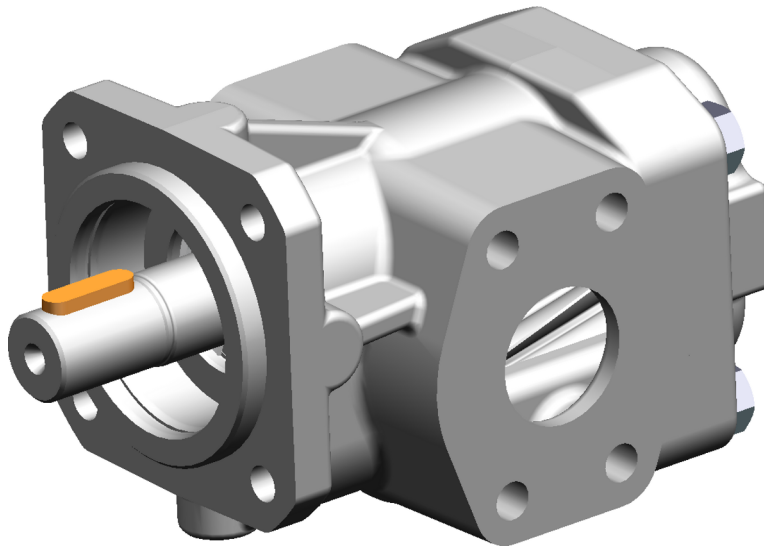

Gear pump KFF 2.5 - 630

88027450002-07

Englisch

2019-03-14

KRACHT

Table of Content

1	General	5
1.1	About the documentation	5
1.2	Manufacturer's address	5
1.3	Applicable documents	5
1.4	Symbolism	6
2	Safety	7
2.1	Intended use	7
2.2	Personnel qualification and training	7
2.3	Basic safety instructions	7
2.4	Basic hazards	8
3	Device description	10
3.1	Functional principle	10
3.2	Particularities KFF	11
3.3	Possible versions	11
3.4	Basic design	12
3.4.1	KFF 2.5 - 630 R/L/B (with end cover)	12
3.4.2	KFF 2.5 - 630 R/L. .-D. (with pressure relief valve)	13
3.5	Rotation and delivery direction	14
3.6	Types of seals	17
3.7	Quench	18
3.8	Type key	19
3.9	Important special numbers	20
4	Technical data	22
4.1	General	22
4.2	Overview nominal sizes	24
4.3	Viscosity - Rotation speed assignment	25
4.4	Permissible pressure range	26
4.4.1	Operating pressure of suction side and pressure side	26
4.4.2	Max. suction side operating pressure for sealing type 2 and 7	27

4.4.3	Differential pressure - viscosity assignment	28
4.5	Permissible temperature range	28
4.6	Material data	29
4.7	Weight	29
4.8	Dimensions	30
5	Transport and storage	31
5.1	General	31
5.2	Transport	31
5.3	Storage	31
6	Installation	33
6.1	Safety instructions for installation	33
6.2	Noise reduction	34
6.3	Mechanical installation	34
6.3.1	Preparation	34
6.3.2	Pumps with free shaft end	34
6.3.3	Coupling Type "R."	36
6.4	Connection lines	40
6.4.1	General	40
6.4.2	Suction line	41
6.4.3	Pressure line	42
6.4.4	Mounting Connection lines	42
6.5	Change of the direction of rotation	43
7	Operation start-up	45
7.1	Safety instructions for start-up	45
7.2	Preparation	45
7.3	Filling the quench chamber	46
7.4	Pressure relief valve adjustment	47
7.5	Further operation start-up	48
8	Removal	49
8.1	Safety instructions for removal	49
8.2	Removal	50
9	Maintenance	51

9.1	Safety instructions for maintenance	51
9.2	Maintenance work	52
9.3	Maintenance instructions	52
10	Repairs	54
10.1	Safety instructions for repair	54
10.2	General	55
10.3	Detecting and eliminating failures	56

1 General

1.1 About the documentation

These operating instructions describe the installation, operation and maintenance of the following device:

Gear pump KFF 2.5 - 630

The device is manufactured in different versions. Information about the version concerned in the individual case can be found on the device's type plate.

These operating instructions are a component of the device and must be kept accessible for the personnel near the device at all times.

If you have any questions about these operating instructions, please contact the manufacturer.

1.2 Manufacturer's address

KRACHT GmbH
Gewerbestraße 20
DE 58791 Werdohl
phone: +49 2392 935-0
fax: +49 2392 935-209
email: info@kracht.eu
web: www.kracht.eu

1.3 Applicable documents

1. KTR Kupplungstechnik GmbH, DE 48407 Rheine
 - KTR-N 40210: Coupling operating/assembly instruction Rotex

Excerpts from these documents are included in these operating instructions.

If required, the original documents can be requested from the respective manufacturer.

1.4 Symbolism



DANGER

Identification of an immediate hazard, which would result in death or severe bodily injury if not avoided.



WARNING

Identification of a potential medium risk hazard, which would lead to death or severe bodily injury if not avoided.



CAUTION

Identification of a low risk hazard, which could lead to minor or medium bodily injury if not avoided.



NOTICE

Flagging of notices to prevent property damage.



Identification of basic safety instructions. Non-compliance can lead to hazards for people and the device.



Flagging of special user tips and other especially useful or important information.

2 Safety

2.1 Intended use

1. The device has been designed for operation with fluid. Dry operation is not permitted.
2. The device may be operated in filled condition only.
The medium must be compatible with the materials used in the device. The chemical competence is necessary for this. Be careful with ethylene oxide or other cathalytic or exothermic or self-decomposing materials. Please consult the manufacturer in cases of doubt.
3. The device may be operated only in usual industrial atmospheres. If there are any aggressive substances in the air, always ask the manufacturer.
4. Operation of the device is only permissible when complying with the operating instructions and applicable documents.
Deviating operating conditions require the express approval of the manufacturer.
5. In case of any use of the device not according to specification, any warranty is voided.

2.2 Personnel qualification and training

The staff designated to assemble, operate and service the device must be properly qualified. This can be through training or specific instruction. Personnel must be familiar with the contents of this operating instructions.



Read the operating instructions thoroughly before use.

2.3 Basic safety instructions



1. Comply with existing regulations on accident prevention and safety at work along with any possible internal operator regulations.
2. Pay attention to the greatest possible cleanliness.
3. Wear suitable personal protection equipment.
4. Do not remove, make illegible or obliterate type plates or other references on the device.
5. Do not make any technical changes on the device.
6. Maintain and clean the device regularly.
7. Use spare parts approved by the manufacturer only.

2.4 Basic hazards



DANGER

Hazardous fluids!

Danger of death when handling hazardous fluids.

1. Comply with the safety data sheets and regulations on handling hazardous fluids.
2. Collect and dispose of hazardous fluids so that no hazards arise for people or the environment.



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Before all work, ensure that existing drives are voltage-free and pressure-free.
2. Securely prevent restarting during all work.



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Take measures against accidental touching of rotating parts.



WARNING

Rotating parts!

Danger of injury from flying parts.

1. Enclose rotating parts so as to avoid any danger from flying parts in the event of breakage or malfunction.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Depressurise the device and all connection lines before doing any work.
2. Securely prevent the restoration of pressure while working on the device.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Use only connections and lines approved for the expected pressure range.
2. Securely prevent exceeding the permissible pressure, e.g. by using pressure relief valves or rupture discs.
3. Design pipework so that no tensions, e.g. caused by changes in length due to fluctuations in temperature, are transmitted to the device.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.


Danger of injury from spurting fluids.

1. Do not operate the device against closed shut-off devices.
2. Do not operate the device in the false direction of rotation.

3 Device description

3.1 Functional principle

KF/KFF series pumps are external gear pump types that work according to the positive displacement principle.

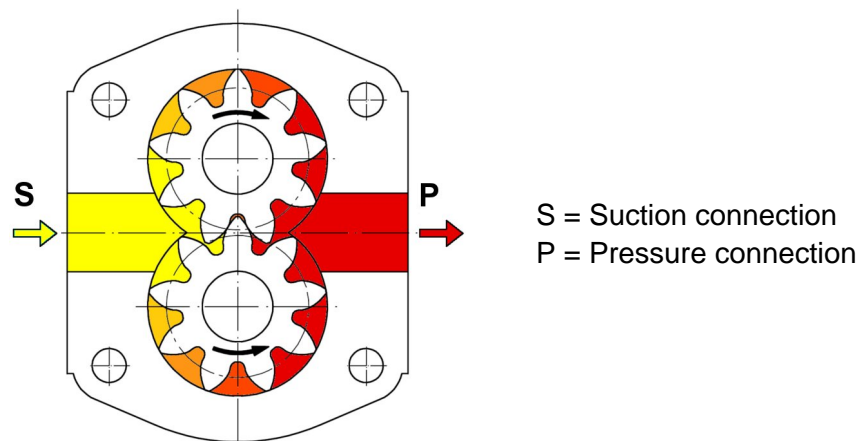

When rotated, two gearwheels meshing together produce a volume enlargement as a result of the opening of the tooth spaces on the suction side (S), so that medium can flow in and so that a corresponding volume is displaced simultaneously by immersion of the teeth into the filled tooth spaces on the pressure side (P). Fluid transport takes place through entrainment in the tooth gaps along the wall of the wheel chamber. The so-called geometric flow rate V_g is being displaced per wheel rotation. A value that is stated in technical documents as rated volume V_{gn} to specify the pump size.

The actually delivered amount of liquid does not correspond with the theoretical value, it is being reduced through losses due to the necessary tolerances. The losses are less the lower the operating pressure and the higher the viscosity of the medium.

Gear pumps are self-priming within wide limits. The displacement cycle describe initially takes place without exhibiting appreciable pressure build-up. Only after setting external loads, for example, through delivery heights, flow resistances, line elements, etc. will the required working pressure arise to overcome these resistances.

As usual with non-axial play compensated pumps, the lateral clearance between gear and front face has been set in such a way that the maximum allowable operating pressure is managed in an adequate and secure way.

Bearing and shaft seal of the device are lubricated by the media. The device's operating life will be reduced if the medium contains abrasive ingredients.

The shaft seal chamber is connected to the device's suction side. The pressure occurring at the shaft seal therefore corresponds to the pressure at the

suction connection of the device. The permissible pressure is determined by the type of sealing.

3.2 Particularities KFF

Type KFF gear pumps were developed specifically for use with fuels, especially for marine fuels.


Especially diesel fuels (MGO/DMA) exhibit low lubricity, which cannot be determined through the viscosity.

The HFRR test acc ISO 12156 is a recognised method for measuring the lubricity of diesel fuels. The characteristic value determined in this manner is referred to as the Wear Scar Diameter (WSD) and increases with decreasing lubricity.

This characteristic value is stated by fuel manufacturers and used when assessing the stability of components.


3.3 Possible versions

Gear pump with end cover



Standard


Gear pump with pressure relief valve



Directly attached pressure relief valves of the series "D" are used exclusively for protection of the gear pumps and may respond on a short-term basis only. Constant triggering of the valve can destroy the gear pump due to overheating.

3.4 Basic design


3.4.1 KFF 2.5 - 630 R/L/B (with end cover)

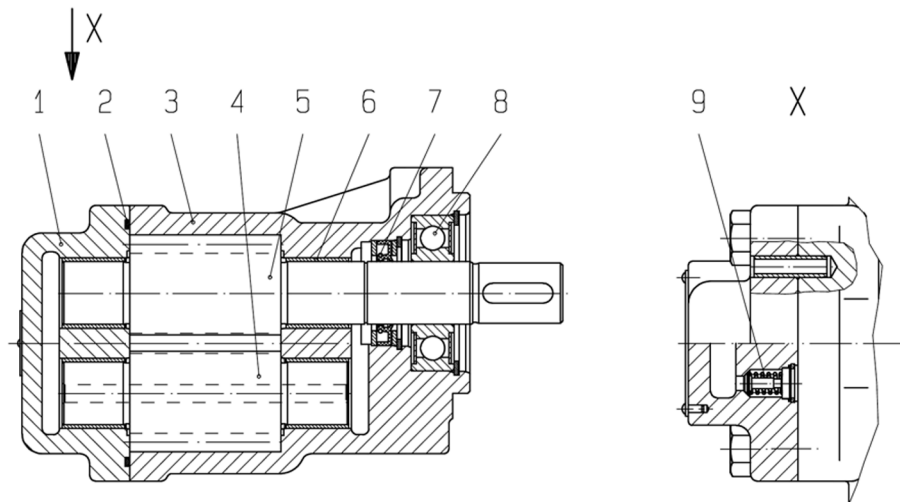

Explanation

- | | |
|-----------------------|---------------------------------|
| 1. End cover | 7. Shaft seal |
| 2. O-Ring | (see "Section: Seal types") |
| 3. Housing | 8. Outboard bearing |
| 4. Driven shaft | (Mounting only: G; X) |
| 5. Driving shaft | 9. Valve |
| 6. Plain bearing bush | (Direction of rotation only: B) |

3.4.2 KFF 2.5 - 630 R/L. -D. (with pressure relief valve)

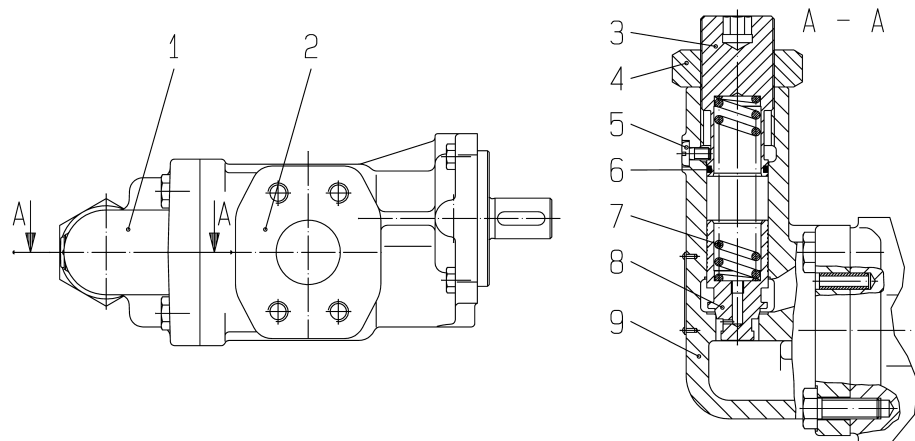

Explanation

- | | |
|--------------------------|-----------------------|
| 1. Pressure relief valve | 6. O-Ring |
| 2. Pump | 7. Compression spring |
| 3. Adjustment screw | 8. Valve cone |
| 4. Hexagonal nut | 9. Housing |
| 5. Retaining screw | |


3.5 Rotation and delivery direction

The following definition applies with respect to the rotation and delivery direction of external gear pumps for pump connections positioned below the drive shaft:


Looking at the pump shaft end, the pumping flow is from left to right when the shaft is moving clockwise.

Looking at the pump shaft end, the pumping flow is from right to left when the shaft is moving counter-clockwise.

Gear pump with end cover








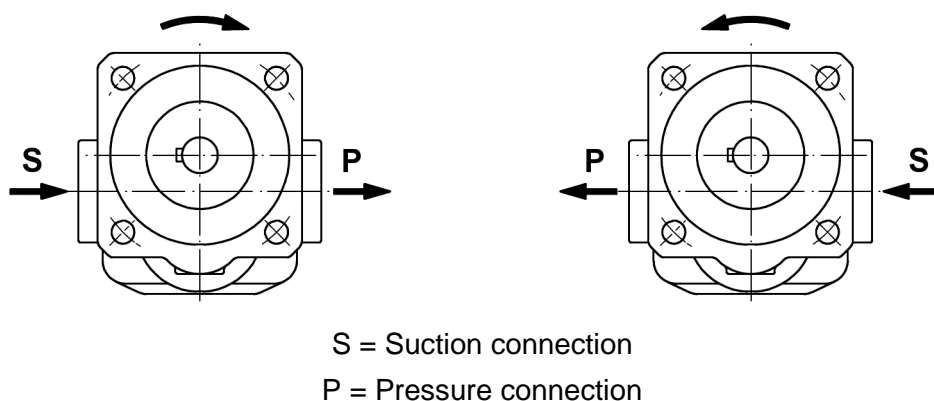







Gear pump with pressure relief valve

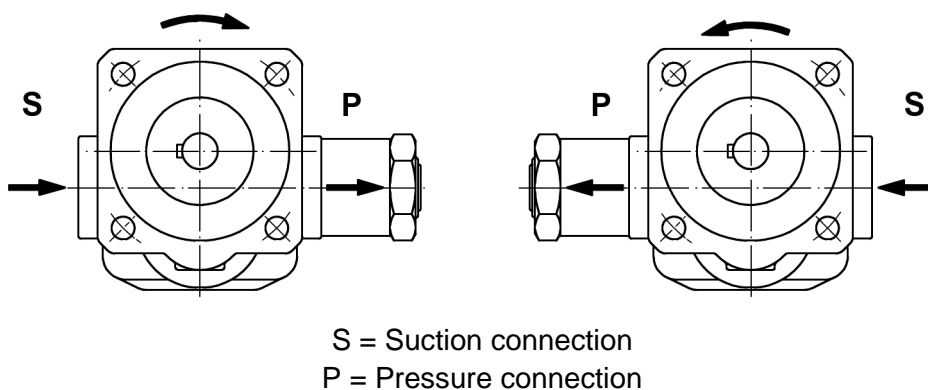


The direction of rotation is indicated by the bent arrow.

The flow direction is indicated by the straight arrows.

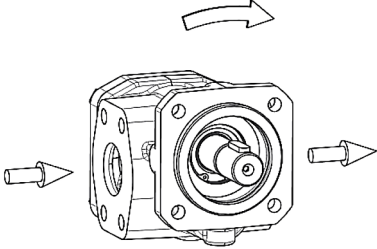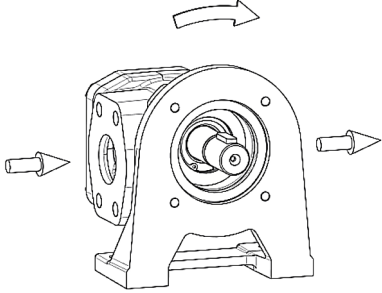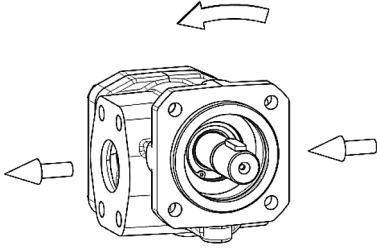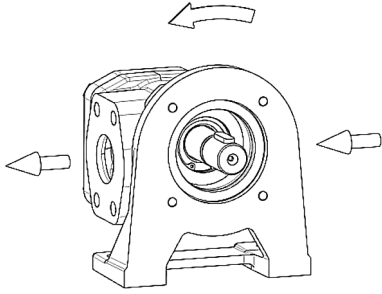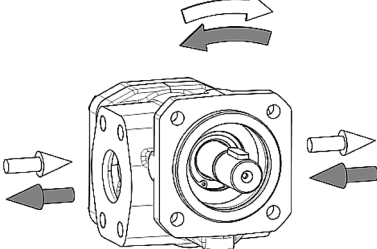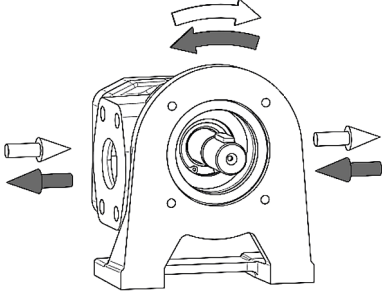
Hydraulic symbol	Flange mounting	Foot mounting
	Gear pump with end cover	
	 KFF . R F/G	 KFF . R W/X
	 KFF . L F/G	 KFF . L W/X
	 KFF . B F/G	 KFF . B W/X
		

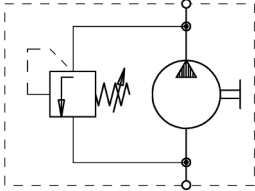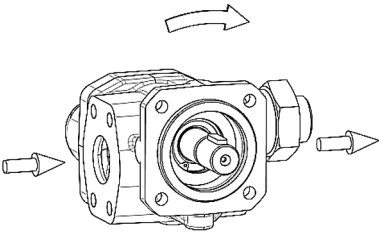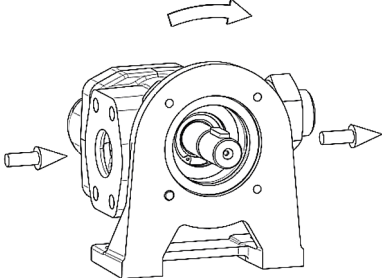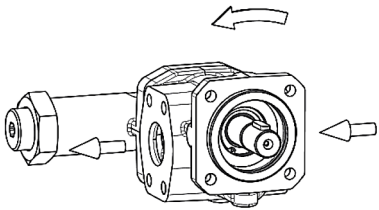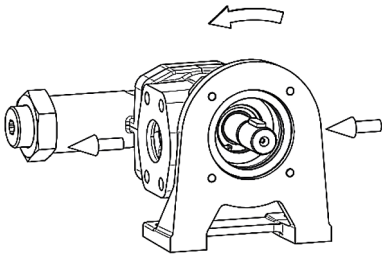Hydraulic symbol	Flange mounting	Foot mounting
	Gear pump with pressure relief valve	
		
	KFF . R F/G. .-D.	KFF . R W/X. .-D.
		
	KFF . L F/G. .-D.	KFF . L W/X. .-D.


3.6 Types of seals

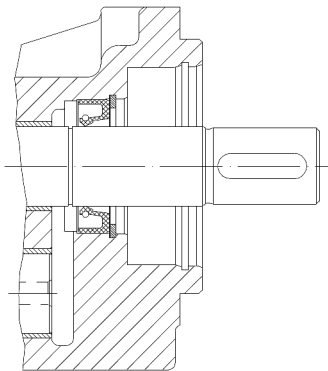


Rotary shaft seal
Seal type: 2

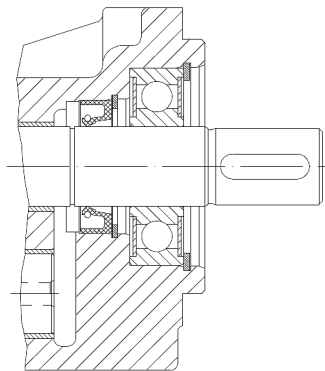


Rotary shaft seal
with outboard bearing
Seal type: 2

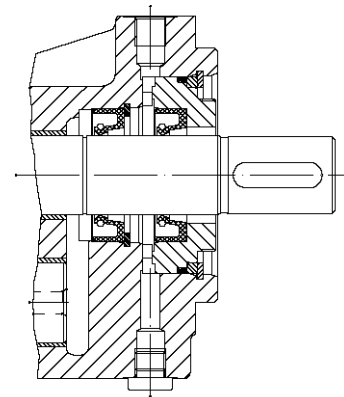

Double rotary shaft seal
Connection borehole G1/8 (for
Quench) ⁽¹⁾
Seal type: 7

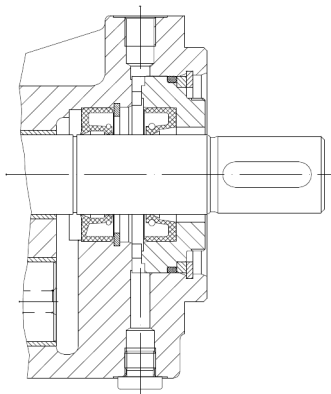

Double rotary shaft seal (for vac-
uum operation)
Connection borehole G1/8 (for
Quench) ⁽¹⁾
Seal type: 7
Special number 74

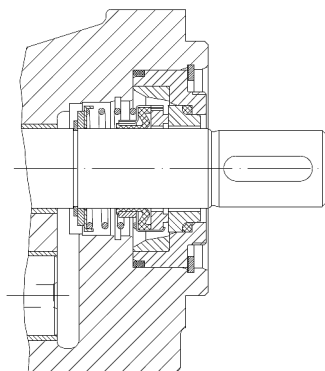

Mechanical seal
Seal type: 5; 40

⁽¹⁾ See [section 3.7 "Quench"](#)

3.7 Quench

Versions with quench are used when absolute leak tightness is required on the shaft seal, e.g. when pumping media

- which cures upon contact with air.
- which crystallises upon contact with air humidity.
- the leakage of which must not be released into the environment.
- are under vacuum and their seal shall be gastight.

Select the mounting position so that the connection for the quench faces up.

3.8 Type key

Ordering example KFF 2.5 - 630												
KFF		40		R	F		2	/...	-	D15	-	...
1.		2.		3.	4.		5.	6.		7.		8.

Explanation of type key KFF 2.5 - 630				
1.	Product name			
2.	Nominal size (Rated volume)			
	V _{gn}	Size 1: 2.5; 4; 5; 6; 8; 10; 12; 16; 20; 25 Size 2: 32; 40; 50; 63; 80 Size 3: 100; 112; 125; 150; 180; 200 Size 4: 250; 315; 400; 500; 630		
3.	Direction of rotation			
	R	Clockwise	B	Clockwise and counterclockwise Flow direction alternating
	L	Counterclockwise		
4.	Fixing type			
	F	DIN flange without outboard bearing	W	Mounting angle without outboard bearing (KFF 2.5 - 200)
	G	DIN flange with outboard bearing	X	Mounting angle with outboard bearing (KFF 2.5 - 200)
5.	Seal type			
	2	Rotary shaft seal FKM (BABSL)	7	Double rotary shaft seal FKM (BABSL)
	5	Mechanical seal with FKM secondary seals (AX15) C2S2V1G3G1 (KFF 2.5 - 200) B10SV1G3G1 (KFF 250 - 630)	40	Mechanical seal with FKM secondary seals (L4) AQ2VFF
6.	Special number for special versions			
		See section 3.9 “Important special numbers”		
7.	Pressure relief valve (only for direction of rotation R or L)			
	D15	Adjustable from 0 - 15 bar	D25	Adjustable from 15 - 25 bar
8.	Housing and cover material			
	No specification	EN-GJS-400-15 (GGG-40)		

3.9 Important special numbers

Special number	Description
74	Double rotary shaft seal (for vacuum operation) Connection borehole G1/8 (for Quench)
158	Housing connection: KFF 2.5 - 12: Flange connection SAE 3/4" KFF 16 - 25: Flange connection SAE 1"
197	Noise-optimized version for aerated oils ⁽¹⁾
232	Housing connection: KFF 50 - 80: Flange connection SAE 2" KFF 100 - 112: Flange connection SAE 2 1/2" KFF 125 - 150: Flange connection SAE 3" KFF 180 - 200: Flange connection SAE 3 1/2"
277	Vertical mounting position (shaft end above) Separate lubrication for rotating shaft seal (reduced pumping rate)
359	Housing connection: KFF 2.5 - 12: Flange connection SAE 3/4" (158) KFF 16 - 25: Flange connection SAE 1" (158) Noise-optimized version for aerated oils ⁽¹⁾ (197)
391	Noise-optimized version for aerated oils ⁽¹⁾ (197) Housing connection: KFF 50 - 80: Flange connection SAE 2" (232) KFF 100 - 112: Flange connection SAE 2 1/2" (232) KFF 125 - 150: Flange connection SAE 3" (232) KFF 180 - 200: Flange connection SAE 3 1/2" (232)
402	Double rotary shaft seal (for vacuum operation) Connection borehole G1/8 (for Quench) (74) Housing connection: KFF 2.5 - 12: Flange connection SAE 3/4" (158) KFF 16 - 25: Flange connection SAE 1" (158) KFF 50 - 80: Flange connection SAE 2" (232) KFF 100 - 112: Flange connection SAE 2 1/2" (232) KFF 125 - 150: Flange connection SAE 3" (232) KFF 180 - 200: Flange connection SAE 3 1/2" (232)
455	Noise-optimized version for aerated oils ⁽¹⁾ (197) Vertical mounting position (shaft end above) Separate lubrication for rotating shaft seal (reduced pumping rate) (277)

Special number	Description
459	Double rotary shaft seal (for vacuum operation) Connection borehole G1/8 (for Quench) (74) Noise-optimized version for aerated oils ⁽¹⁾ (197) Housing connection: KFF 2.5 - 12: Flange connection SAE 3/4" (158) KFF 16 - 25: Flange connection SAE 1" (158) KFF 50 - 80: Flange connection SAE 2" (232) KFF 100 - 112: Flange connection SAE 2 1/2" (232) KFF 125 - 150: Flange connection SAE 3" (232) KFF 180 - 200: Flange connection SAE 3 1/2" (232)
⁽¹⁾ Measures for noise optimisation are only possible for one rotational direction and only effective for aerated oils or vacuum (only in connection with seal versions that are suitable for vacuum operation). Can lead to a reduction of delivery rate.	

4 Technical data

4.1 General

General information KFF 2.5 - 630		
Design		External gear pump
Fixing type		Flange similar DIN ISO 3019 or Foot mounting
End of drive shaft		ISO R 775 short-cylindrical
Housing connection ⁽¹⁾	KFF 2.5 - 12	Whitworth pipe thread G3/4
	KFF 2.5 - 12 .. ./158	Flange connection SAE 3/4"
	KFF 16 - 25	Whitworth pipe thread G1
	KFF 16 - 25 .. ./158	Flange connection SAE 1"
	KFF 32 - 80	Flange connection SAE 1 1/2"
	KFF 50 - 80 .. ./232	Flange connection SAE 2"
	KFF 100 - 112	
	KFF 100 - 112 .. ./232	Flange connection SAE 2 1/2"
	KFF 125 - 150	
	KFF 125 - 150 .. ./232	Flange connection SAE 3"
	KFF 180 - 200	
	KFF 180 - 200 .. ./232	Flange connection SAE 3 1/2"
	KFF 250 - 315	Flange connection SAE 3"
	KFF 400 - 630	Flange connection SAE 4"
Mounting position	KFF . R/L/B without fluid buffer	Any ⁽²⁾
	KFF . R/L/B with fluid buffer	Shaft end horizontal, fluid buffer connection top
External loads on shaft end		See section 4.2 “Overview nominal sizes”
Speed	n	See section 4.2 “Overview nominal sizes” + section 4.3 “Viscosity - Rotation speed assignment”
Operating pressure	p _e p _b	See section 4.4 “Permissible pressure range”
Viscosity	v _{min}	See section 4.4.3 “Differential pressure - viscosity assignment”
	v _{max}	20000 mm²/s
Fluid temperature	ϑ _m	See section 4.5 “Permissible temperature range”
Ambient temperature	ϑ _u	
Material		See section 4.6 “Material data”
Filtering		Filter porosity ≤ 60 µm

General information KFF 2.5 - 630	
Permissible media	Lubricating fluids without abrasive components. Fuels (WSD \leq 520 μ m) Petrols, solvents, etc. are not permissible.
⁽¹⁾ <i>Pipe thread: ISO 228-1; Flange connection: ISO 6162-1 (SAE J518)</i>	
⁽²⁾ <i>A reduced service life must be expected for the shaft seal in the case of vertical installation (shaft end top).</i>	

4.2 Overview nominal sizes

Nominal size V _{gn}	Geom. displacement V _g [cm ³ /rev.]	Speed n		Perm. radial force ⁽¹⁾ F _{radial} [N] (n = 1500 rpm)	Permissible axial force F _{axial} [N] (n = 1500 rpm)	Sound pressure level ⁽²⁾ L _{pA} [dBA]	Mass inertia x10 ⁻⁶ J [kg m ²]
		n _{min} [rpm]	n _{max} [rpm] ⁽³⁾				
2,5	2.55	200	3600	700	-	≤ 67	14.0
4	4.03						15.9
5	5.05						17.8
6	6.38						20.5
8	8.05						24.0
10	10.11						28.4
12	12.58						33.7
16	16.09						42.3
20	20.1						50.8
25	25.1						61.7
32	32.12		1500	217			
40	40.21					254	
50	50.2					299	
63	63.18					368	
80	80.5					443	
100	101.5					≤ 69	741
112	113.5						806
125	129.4					≤ 65	1418
150	155.6						1637
180	186.6						1911
200	206.2		2072				
250	245.1		2000	2500		≤ 75	4133
315	312.9						5011
400	399.5					≤ 77	6618
500	496.5						7830
630	622.5					≤ 80	9591

⁽¹⁾ Outside forces are only permissible in combination with an outboard bearing. F_{radial} on central shaft end.

⁽²⁾ $n = 1500$ rpm ; $v = 34$ mm²/s ; $p = 5 - 25$ bar.

⁽³⁾ Pay attention to the viscosity.

4.3 Viscosity - Rotation speed assignment

Kinematic viscosity ν [mm ² /s]									
100	200	300	500	1000	2000	3000	6000	10000	20000
3600	2900	2300	1800	1200	800	650	450	300	200
Recommended rpm n [rpm]									



Select the speed of rotation so that complete filling of the pump is ensured. This is given if the pressure on the suction side does not fall below the permissible pressure $p_{e \text{ min.}}$

4.4 Permissible pressure range

4.4.1 Operating pressure of suction side and pressure side

Fuels (WSD ≤ 520 µm) ⁽²⁾						
Seal type ⁽¹⁾		Special number	Operating pressure p ^{(3) (4)}			
			Suction side		Pressure side	
			p _{e min} [bar abs.]	p _{e max} [bar]	p _b [bar] (perm. continuous pressure)	p _{b max} [bar] (Pressure peaks)
2	WDR (BABSL)	-	0.6 ⁽⁵⁾	See section 4.4.2 "Max. suction side operating pressure for sealing type 2 and 7"	12	-
5	GLRD (AX15)	-		10		
7	DRWDR (BABSL)	-		See section 4.4.2 "Max. suction side operating pressure for sealing type 2 and 7"		
		74	0.1	0.2		
40	GLRD (L4)	-	0.6 ⁽⁵⁾	10		

⁽¹⁾ WDR: Rotary shaft seal, DRWDR: Double rotary shaft seal, GLRD: Mechanical seal
⁽²⁾ Limit value applicable for marine fuels compliant with ISO 8217 (WSD = Wear Scar Diameter).
⁽³⁾ bar abs.: absolute pressure, bar: relative pressure
⁽⁴⁾ See also [section 4.4.3 "Differential pressure - viscosity assignment"](#).
⁽⁵⁾ Start-up condition: 0.4 bar absolute (max. 30 minutes).

Standard						
Seal type ⁽¹⁾		Special number	Operating pressure p ^{(2) (3)}			
			Suction side		Pressure side	
			p _{e min} [bar abs.]	p _{e max} [bar]	p _b [bar] (perm. continuous pressure)	p _{b max} [bar] (Pressure peaks)
2	WDR (BABSL)	-	0.6 ⁽⁴⁾	See section 4.4.2 "Max. suction side operating pressure for sealing type 2 and 7"	25	40
5	GLRD (AX15)	-		10		
7	DRWDR (BABSL)	-		See section 4.4.2 "Max. suction side operating pressure for sealing type 2 and 7"		
		74	0.1	0.2		
40	GLRD (L4)	-	0.6 ⁽⁴⁾	10		

⁽¹⁾ WDR: Rotary shaft seal, DRWDR: Double rotary shaft seal, GLRD: Mechanical seal
⁽²⁾ bar abs.: absolute pressure, bar: relative pressure
⁽³⁾ See also [section 4.4.3 "Differential pressure - viscosity assignment"](#).
⁽⁴⁾ Start-up condition: 0.4 bar absolute (max. 30 minutes).

4.4.2 Max. suction side operating pressure for sealing type 2 and 7

Speed n [rpm]	p _{e max} [bar]					
	KFF 2.5 - 63	KFF 80	KFF 100 - 180	KFF 200	KFF 250 - 315	KFF 400 - 630
≤ 750	6	6	6	6	5.5	5
≤ 1000	5	5	5	5	4.5	4
≤ 1500	4	4	3.5	3.5	3	2.5
≤ 2000	3	3	2.5	2.5	2	1.5
≤ 2500	2.5	2.5	2	2	-	-
≤ 3000	2	2	1.5	-	-	-
≤ 3600	1.5	-	-	-	-	-

4.4.3 Differential pressure - viscosity assignment

Fuels (WSD $\leq 520 \mu\text{m}$) ⁽¹⁾	
Bearing	Δp_{max} [bar]
	$\nu \geq 1.2 \text{ mm}^2/\text{s}$
Multi layer friction bearings contains lead (Standard) DU, P10	12

⁽¹⁾ Limit value applicable for marine fuels compliant with ISO 8217 (WSD = Wear Scar Diameter).

Standard			
Bearing	Δp_{max} [bar]		
	$\nu \geq 1.4 \text{ mm}^2/\text{s}$	$\nu \geq 6 \text{ mm}^2/\text{s}$	$\nu \geq 12 \text{ mm}^2/\text{s}$
Multi layer friction bearings contains lead (Standard) DU, P10	3	12	25

4.5 Permissible temperature range

Sealing material	Fluid temperature ϑ_{m} ⁽¹⁾	
	$\vartheta_{\text{m min}}$ [°C]	$\vartheta_{\text{m max}}$ [°C]
FKM	-20	150

⁽¹⁾ Comply with media-specific properties.

Sealing material	Ambient temperature ϑ_{u}	
	$\vartheta_{\text{u min.}}$ [°C]	$\vartheta_{\text{u max.}}$ [°C]
FKM	-20	60

4.6 Material data

Seal type ⁽¹⁾		Material				
		Shaft seal	O-rings	Housing/End cover	Gears	Bearing
2	WDR (BABSL)	FKM	FKM	EN-GJS-400-15 (GGG-40)	Case-hard-ened steel (1.7139)	Multi layer fric-tion bearings contains lead (Standard) DU, P10 (Steel, CuSn, PTFE, Pb)
5	GLRD (AX15)	C2S2V1G3G1 ⁽²⁾ (KFF 2.5 - 200)	FKM			
		B10SV1G3G1 ⁽³⁾ (KFF 250 - 630)				
7	DRWDR (BABSL)	FKM	FKM			
40	GLRD (L4)	AQ2VFF ⁽⁴⁾	FKM			

⁽¹⁾ WDR: Rotary shaft seal, DRWDR: Double rotary shaft seal, GLRD: Mechanical seal

⁽²⁾ Metal-impregnated carbon /CrMo-Steel, FKM, CrNiMo-Steel

⁽³⁾ Resin-impregnated carbon , Cr-casting, FKM, CrNiMo-Steel

⁽⁴⁾ Metal-impregnated carbon /SiC, FKM, CrNi-Steel

4.7 Weight

Nominal size V _{gn}	Gear pump [kg]		Added weight Mounting angle [kg]
	with end cover	with D - valve	
2.5	2.9 (KFF . /158: +1.3)	3.7 (KFF . /158: +1.3)	1.3
4			
5			
6			
8			
10			
12	3.5 (KFF . /158: +1.3)	4.3 (KFF . /158: +1.3)	1.3
16			
20			
25			
32	7.7	9.5	1.6
40			
50			
63			
80	9.4	11.2	

Nominal size V _{gn}	Gear pump [kg]		Added weight Mounting angle [kg]
	with end cover	with D - valve	
100	16.0	18.7	3.3
112			
125	22.2	26.5	
150			
180	24.8	29.1	
200			
250	44.2	47.2	-
315			
400	54.7	57.9	
500			
630	60.8	64.0	

4.8 Dimensions

Dimensions of the device can be found in the relevant technical data sheets.

5 Transport and storage

5.1 General

- After receipt, check the device for transport damages.
- If transport damage is noticed, report this immediately to the manufacturer and the carrier. The device must then be replaced or repaired.
- Dispose of packing material and used parts in accordance with the local stipulations.

5.2 Transport



WARNING


Falling or overturning loads!

Danger of injury while transporting large and heavy loads.

1. Use only suitable means of conveyance and lifting tackle with sufficient load-bearing capacity.
2. Attach lifting tackle only to suitable load points.
3. Attach the lifting tackle in such a manner that it cannot slip.
4. Pay attention to the load balance point.
5. Always avoid jerks, impacts and strong vibrations during transportation.
6. Never walk under suspended loads, never work under suspended loads.



To transport the device, eyebolts can be screwed into the flange connections.

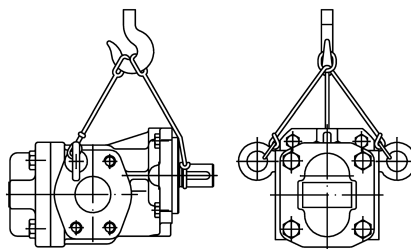

5.3 Storage

The device's function is tested in the plant with mineral hydraulic oil. Then all connections are closed. The remaining residual oil preserves the interior parts for up to 6 months.

Metallic exposed exterior parts are protected against corrosion by suitable conservation measures, also up to 6 months.

In case of storage, a dry, dust-free and low-vibration environment is to be ensured. The device is to be protected against influences from weather, moisture and strong fluctuations of temperature. The recommended storage conditions are to be adhered to.

Below the permissible ambient temperature ϑ_u elastomer seals lose their elasticity and mechanical loading capacity, since the glass transition temperature is fallen below. This procedure is reversible. A force action on the device is to be avoided in case of storage below the permissible ambient temperature ϑ_u .

Devices with EPDM seals are not mineral-oil resistant and are not tested for their function. There is no preservation of the interior parts. If the device is not taken into operation immediately, all corrosion-prone surfaces are to be protected by suitable conservation measures. The same applies for devices which are not tested for other reasons.

When storing for a long period of time (> 6 months), treat all surfaces at risk of corrosion again with suitable preserving agents.

If high air humidity or aggressive atmospheres are expected, take additional corrosion-preventing measures.



Storage in corrosion protection bags (VCI) maximum of 6 months.



NOTICE

Corrosion/chemical impact

Improper storage can render the device useless.

1. Protect endangered surfaces by means of suitable conservation measures.
2. Comply with recommended storage conditions.



Recommended storage conditions

1. Storage temperature: 5 °C - 25 °C
2. Relative air humidity: < 70 %
3. Protect elastomer parts from light, especially direct sunlight.
4. Protect elastomer parts from oxygen and ozone.
5. Comply with maximum storage times of elastomeric parts:
 - 5 Years: AU (Polyurethane rubber)
 - 7 Years: NBR, HNBR, CR
 - 10 Years: EPM, EPDM, FEP/PTFE, FEPM, FKM, FFKM, VMQ, FVMQ

6 Installation

6.1 Safety instructions for installation



DANGER

Hazardous fluids!

Danger of death when handling hazardous fluids.

1. Comply with the safety data sheets and regulations on handling hazardous fluids.
2. Collect and dispose of hazardous fluids so that no hazards arise for people or the environment.



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Before all work, ensure that existing drives are voltage-free and pressure-free.
2. Securely prevent restarting during all work.



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Take measures against accidental touching of rotating parts.



WARNING

Rotating parts!

Danger of injury from flying parts.

1. Enclose rotating parts so as to avoid any danger from flying parts in the event of breakage or malfunction.



WARNING

Unshielded gearwheels!

Gearwheels can trap and crush fingers and hands.

1. Do not engage gearwheels.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Depressurise the device and all connection lines before doing any work.
2. Securely prevent the restoration of pressure while working on the device.

6.2 Noise reduction



Measures for noise reduction

1. Use suction and pressure hoses.
2. Use bell housings with high damping properties (plastic or cast iron).
3. Use of damping rings and damping rods for separation of structure-borne noise.

6.3 Mechanical installation

6.3.1 Preparation

- Check the device for transport damage and dirt.
- Check the device for freedom of movement.
- Remove existing preservatives.
 - Use only those cleaning agents that are compatible with the materials used in the device.
 - Do not use cleaning wool.
- Compare the environmental and ambient conditions at the place of installation to the permissible conditions.
 - Ensure a sufficiently stable and level foundation.
 - Expose the device only to small vibrations, see IEC 60034-14.
 - Secure sufficient access for maintenance and repair.

6.3.2 Pumps with free shaft end

The prerequisite for trouble-free operation is suitable load transmission between the pump and the drive. By default a torsionally flexible claw coupling Type "R" is used for this.

- Pre-mount coupling parts as per manufacturer's specifications.



Torsionally flexible claw coupling type "R.": See [section 6.3.3 "Coupling Type "R.""](#)

- Position the pumps and the drive with respect to each other.
 - Comply with the permissible mounting position.
 - Comply with the permissible direction of rotation.



Rotation and delivery direction: See [chapter 3 “Device description”](#)

- Tighten all fastening screws with the specified torque.
 - Keep to the permissible displacement values of the coupling.
 - Rule out any distortion of the device.
 - Pay attention to sufficient screw-in depth of the fastening screws.

Tightening torques [Nm]							
Thread size ⁽¹⁾	M6	M8	M10	M12	M16	M20	M24
Counter-thread Aluminium	4.6	11	22	39	95	184	315
Counter-thread Cast iron/Steel	10	25	49	85	210	425	730
⁽¹⁾ Screws/Nuts with min. strength class 8.8/8							

- For devices without shaft seals, ensure that the leak oil from the shaft sealing chamber is specifically drained off and cannot get into the environment.
- Make sure no foreign bodies can get into the device.
- Take measures against accidental touching of rotating parts.
- Take measures against accidental touching of hot surfaces (> 60 °C).
- On devices with quench, mount a tank for the liquid seal.
 - Mount the tank above the device.
 - The connection on the device must point upward.
 - Checking the fluid level must be possible at any time.




A second port on the unit enables purging of the quench chamber and draining of the liquid seal.

6.3.3 Coupling Type "R."

Claw couplings Type "R." are torsionally flexible and transmit the torque positive. They are fail-safe. The vibrations and impacts that occur during operation are effectively dampened and reduced.

Claw coupling Type "R."

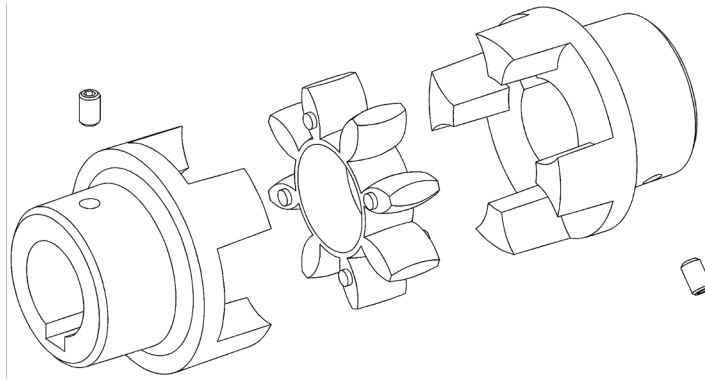


NOTICE

Coupling breakage or increased wear

An overload can lead to premature failure of the coupling.

1. Ensure safe dimensioning when designing the coupling. Take vibrations, torque peaks and temperatures into account.

Assembly data

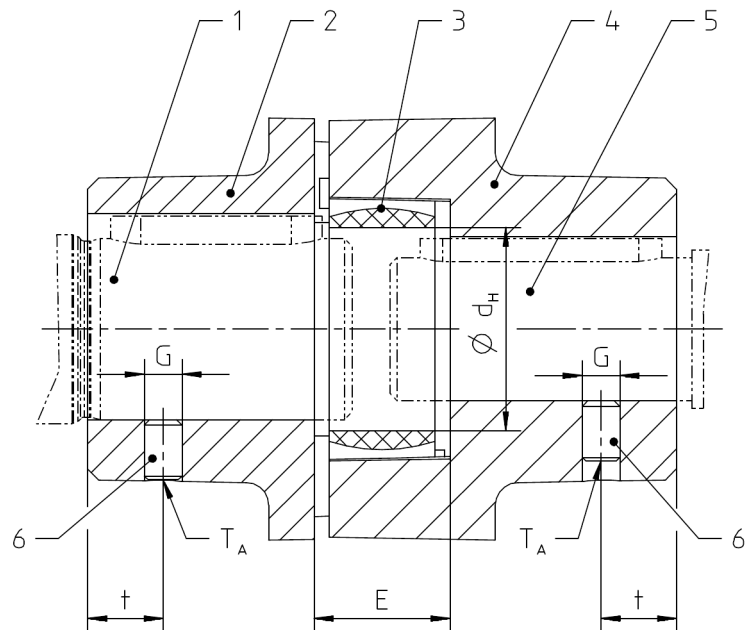

Explanation

- | | |
|-------------------------------|---|
| 1. Shaft projects into spider | 4. Coupling halve |
| 2. Coupling halve | 5. Shaft with parallel key projects into spider |
| 3. Spider | 6. Setscrew |

When installing the coupling, maintain the "E" gap dimension so that the spider remains free during operation. If the shaft diameters are less than (also with parallel key) the dimension d_H of the spider, the shaft ends can protrude out into the spider.

Coupling size ⁽¹⁾	14	19	24	28	38	42	48	55	65	75
	-	19/24	24/28	28/38	38/45	42/55	48/60	55/70	65/75	75/90
Coupling clearance E [mm]	13	16	18	20	24	26	28	30	35	40
d_H [mm]	10	18	27	30	38	46	51	60	68	80
G	M4	M5	M5	M8	M8	M8	M8	M10	M10	M10
t [mm]	5	10	10	15	15	20	20	20	20	25
Tightening torque T_A [Nm]	1.5	2	2	10	10	10	10	17	17	17
⁽¹⁾ Example: R.19-Z25/14-Z25/19 or R.19/24-Z25/14-Z25/24.										



For assembly, the coupling halves can be heated to approx. 80 °C and pushed onto the shaft ends while warm.

**CAUTION****Hot surfaces!**


Burn injury to skin if touched.

1. Wear protective gloves at temperatures $\geq 48^{\circ}\text{C}$.


- Mount the coupling halves on the shaft ends but avoid impacts on the components.
- Position the coupling halves on the shaft ends so that in later operation the "E" gap dimension is maintained.
- Secure the coupling halves by tightening the setscrews.
- Insert the spider in a coupling half.

Displacement values


Axial displacement
 ΔK_a

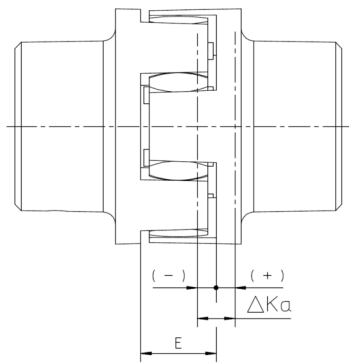

Radial displacement
 ΔK_r

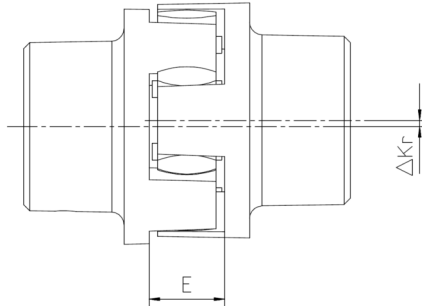

Angular displacement
 $\Delta K_w / \Delta K_L$

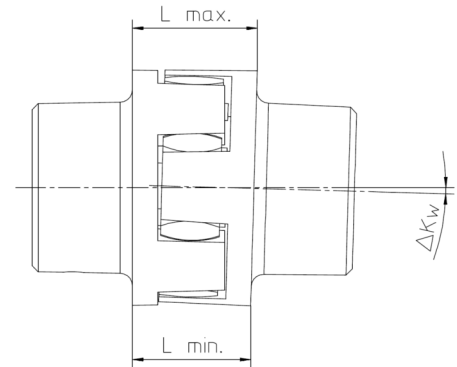

$$\Delta K_L \triangleq L_{\max} - L_{\min}$$

Coupling size		14	19	24	28	38	42	48	55	65	75
		-	19/24	24/28	28/38	38/45	42/55	48/60	55/70	65/75	75/90
Coupling clearance E [mm]		13	16	18	20	24	26	28	30	35	40
ΔK_a [mm]		+1.0	+1.2	+1.4	+1.5	+1.8	+2.0	+2.1	+2.2	+2.6	+3.0
		-0.5	-0.5	-0.5	-0.7	-0.7	-1.0	-1.0	-1.0	-1.0	-1.5
ΔK_r [mm]	1500 rpm	0.11	0.13	0.15	0.18	0.21	0.23	0.25	0.27	0.30	0.34
	3000 rpm	0.08	0.09	0.1	0.13	0.15	0.16	0.18	0.19	0.21	0.24
ΔK_w [De- gree]	1500 rpm	1.1	1.1	0.8	0.8	0.9	0.9	1.0	1.0	1.1	1.1
	3000 rpm	1.0	1.0	0.7	0.7	0.8	0.8	0.9	0.9	1.0	1.0
ΔK_L [mm]	1500 rpm	0.57	0.77	0.77	0.90	1.25	1.40	1.80	2.00	2.50	3.00
	3000 rpm	0.52	0.7	0.67	0.80	1.00	1.30	1.60	1.80	2.20	2.70

Displacement combinations

Examples for displacement combinations shown in the photo opposite:

Example 1:

$\Delta K_r = 30 \%$


$\Delta K_w = 70 \%$

Example 2:

$\Delta K_r = 60 \%$

$\Delta K_w = 40 \%$

$\Delta K_r + \Delta K_w \leq 100 \%$

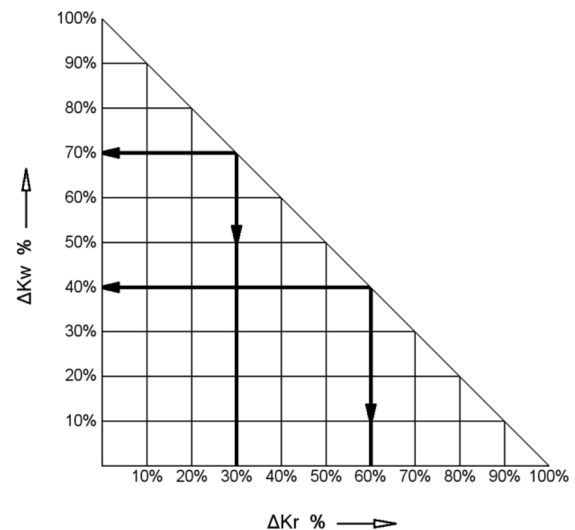

6.4 Connection lines

6.4.1 General



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Use only connections and lines approved for the expected pressure range.
2. Securely prevent exceeding the permissible pressure, e.g. by using pressure relief valves or rupture discs.
3. Design pipework so that no tensions, e.g. caused by changes in length due to fluctuations in temperature, are transmitted to the device.



Additional connections

1. Provide measurement connections for pressure and temperature as close as possible to device.
2. If necessary, provide a facility to fill or empty the device and the line system.
3. If necessary, provide a facility to vent the device and the line system.

6.4.2 Suction line

A less than optimally planned suction line can lead to increased noise emission, cavitation as well as reduction of the delivery rate (caused by not complete filling of the pump).

When designing the line, take the following points into consideration:


- The suction line must be piped as short as possible and in a straight line.
- Stipulate the nominal width of the suction line so that the permissible operating pressure $p_{e\ min}$ is not exceeded on the suction side.
- Avoid large suction heights.
- Avoid additional pressure loss through line resistances such as fittings, screwed connections, formed parts or suction filters/suction baskets.
Ensure that all technically required suction filters/suction baskets are appropriately dimensioned.
- Make sure there is sufficient clearance of the suction port to the bottom and walls of the media container.
- Make sure that the suction opening lies underneath the lowest fluid level in all operating situations.
- When hose lines are used, ensure sufficient stability of the hoses so that they cannot become constricted through the sucking action.
- Comply with the recommended flow velocity in the suction line (max. 1.5 m/s).

Suction line at vacuum operation

If suction from a tank under vacuum is desired, the pump must be arranged approx. 1 m below the tank. The suction line must run in a straight line and without any resistances.

The tank may be subjected to vacuum only then when the pipework and the pump have been filled with liquid.

For this application, only pumps suitable for vacuum operation may be used.



(1) Vacuum



NOTICE


Cavitation damage

Undercutting the permissible suction port pressure results in cavitation.


1. Design the suction line so that the pressure arising in operation on the suction side is always higher than the vapour pressure of the pumped medium. At the same time, comply with the installation altitude of the device above mean sea level.
2. For aqueous fluids, mount the device underneath the fluid level, set the operating temperature to 50 °C and limit the speed to 1500 rpm.

Prevention of suction problems

If there is a possibility that the suction line can run dry if the pump stops, piping the suction line as siphon is an option to avoid suction problems. This way, the pump will remain permanently filled after initial commissioning.




It is appropriate to employ a foot valve or a non-return valve in case of longer suction lines that can run dry while the pump is at rest. These must have been designed for use in suction lines and should offer as low a flow resistance as possible.



During operation of a pump that has to pump media via a non-return valve in a pressurized circuit (e.g. reserve pump in a lubricant circuit), suction problems can occur if the suction line is filled with air.

In this case the pressure pipe must be bled directly upstream of the non-return valve.

If no vent nozzle is used, the volume of the pressure pipe between the pump and the non-return valve must be at least 75 % of the suction line volume.



6.4.3 Pressure line

When designing the line, take the following points into consideration:

- Select the nominal width of the pressure line so that the maximum permissible pressures are not exceeded.
- If necessary, provide a vent nozzle to prevent suction problems.

6.4.4 Mounting Connection lines



Position of the device connections: See [chapter 3 "Device description"](#)

- Clean all lines.
 - Do not use cleaning wool.
 - Pickle and flush welded pipes.
- Remove the protective plugs.
- Mount the lines.
 - Comply with the manufacturer's information.
 - Do not use any sealing materials such as hemp, Teflon tape or putty.

6.5 Change of the direction of rotation

For pump types KFF . R and KFF . L, a change of the direction of rotation is only possible by converting.

The manufacturer normally carries out the conversion work and the customer should do this only in exceptional cases. Please consult the manufacturer about this.



Gear pumps in noise-optimized version cannot be converted. (e.g. special number **197**)



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Before all work, ensure that existing drives are voltage-free and pressure-free.
2. Securely prevent restarting during all work.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Depressurise the device and all connection lines before doing any work.
2. Securely prevent the restoration of pressure while working on the device.




NOTICE

Leaks or increased wear

Damaged sealing surfaces or supports lead to lack of sealing and/or faults in later operation.

1. When assembling or disassembling housing components, be sure not to damage the bearings, e.g. by tilting.
2. When disassembling housing components, do not use screwdrivers or the like as a lever to separate the joints.
3. Do not remove, damage or jam seals.

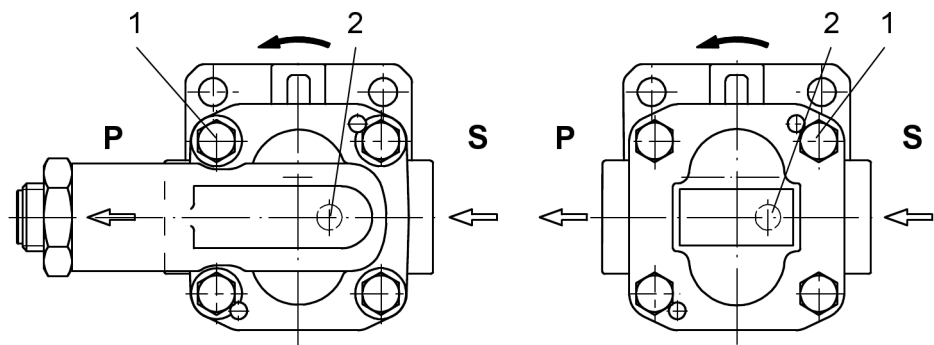

S = Suction connection
P = Pressure connection

1. Fastening screws
2. Leak oil hole

To change the direction of rotation of the gear pump, turn the end cover or the pressure relief valve 180°.

- Loose fastening screws.
- Unscrew the end cover or the pressure relief valve of the pump housing and replace it rotated 180°.
- Tighten the fastening screws with the stated torque.

Fastening screws KFF 2.5 - 630				
Gear pump	KFF 2.5 - 25	KFF 32 - 80	KFF 100 - 200	KFF 250 - 630
Tightening torques [Nm]	25	49	85	215

When checking, pay attention to the following points:

1. For gear pumps without pressure relief valve, the leak oil hole in the end cover must be placed at the pump's suction side.
2. Gear pumps with pressure relief valve must have their pressure relief valve adjusting screw point toward the pump's pressure side.

7 Operation start-up

7.1 Safety instructions for start-up



DANGER

Hazardous fluids!

Danger of death when handling hazardous fluids.

1. Comply with the safety data sheets and regulations on handling hazardous fluids.
2. Collect and dispose of hazardous fluids so that no hazards arise for people or the environment.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Do not operate the device against closed shut-off devices.
2. Do not operate the device in the false direction of rotation.



CAUTION

Hot surfaces!


Burn injury to skin if touched.

1. Wear protective gloves at temperatures $\geq 48^{\circ}\text{C}$.

7.2 Preparation

- Before starting the system make sure that a sufficient quantity of the operating fluid is extant to avoid dry running.
Take this into consideration especially with high output volumes.
- Check all fastening screws on the device.
- Fill pump and the suction line with medium.

7.3 Filling the quench chamber

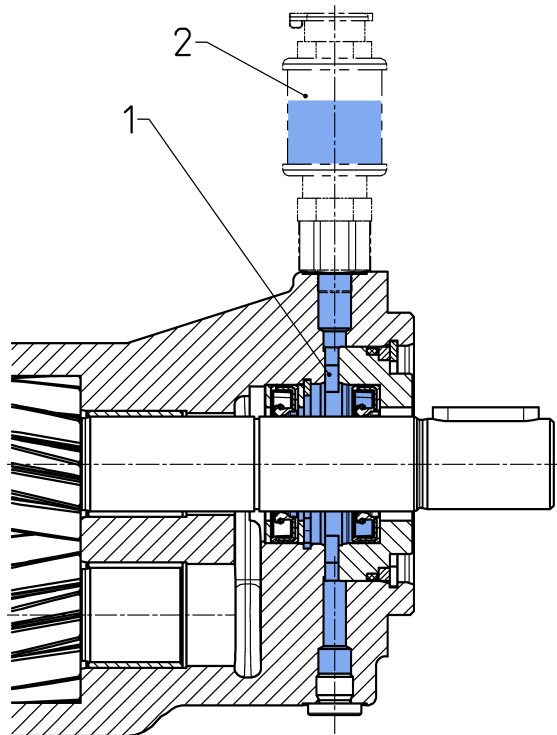

1. Quench chamber
2. Container for quench-liquid (Accessories)

- For versions with quench, fill the quench chamber with a suitable quench liquid.
 - The filling is implemented through the tank provided for that.
 - Fill fluid until the quench chamber is completely full and the tank is half full.
- Do not apply pressure or vacuum to the quench chamber.



NOTICE

Seal failure due to dry run

A lack of quench liquid can lead to a failure of the seal.

1. Do not put pumps without quench liquid into operation.



A second port on the unit enables purging of the quench chamber and draining of the liquid seal.

7.4 Pressure relief valve adjustment

Directly attached pressure relief valves of the series "D" are used exclusively for protection of the gear pumps and may respond on a short-term basis only.

The valves are factory set to the rated pressure of each pressure stage. Setting pressures that deviate from this are stated on the rating plate.




NOTICE

Failure of the pump

Long triggering of the valve can cause the pump to overheat.

1. Only allow intermittent triggering of the valve.

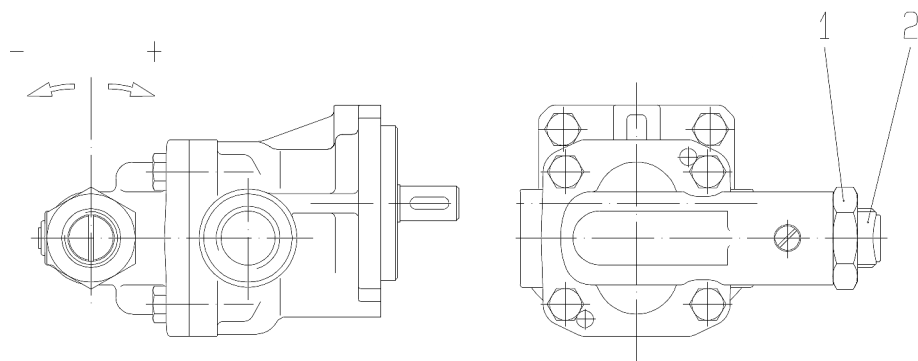

- Lower response pressure
- + Higher response pressure

1. Hexagonal nut
2. Adjustment screw

Pressure setting:

- Remove hexagon nut
- Set the response pressure using the adjusting screw
- Secure the adjusting screw with hexagon nut



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Consider the permissible pressure setting range of the valve.
2. Check the pressure setting (the valve must not block).

7.5 Further operation start-up

- Open existing shut-off elements upstream and downstream of the device.
- Adjust pressure relief valves in the system installed for lowest opening pressure.
- Allow the device start without or with a low pressure load (jog mode).
 - Flow should have developed after 30 s at the latest.
- Run the device for a few minutes depressurised or with low pressure.
- Vent the system at the highest possible point.
- Gradually increase the pressure load up to the desired operating pressure.
- Operate the system for so long until the final operating state is achieved.
- Check the operating data such as:
 - Discharge flow
 - Operating pressure (as close as possible to device)
 - Fluid temperature (as close as possible to device)
 - Device temperature (in particular in the area of the bearing points)
 - ...
- Document the operating data of the initial start-up for later comparison.
- Check the level of the operating medium in the system.
- Check the filling level of the liquid seal (if existing).
- Check the device for leaks.
- Check all threaded connections for leaks and retighten if necessary.



In order to ensure a constant and reliable function of the device, an initial maintenance of the device is recommended after several hours warm-up time (max. 24 h). Faults can thus be identified at an early stage.

8 Removal

8.1 Safety instructions for removal



DANGER

Hazardous fluids!

Danger of death when handling hazardous fluids.

1. Comply with the safety data sheets and regulations on handling hazardous fluids.
2. Collect and dispose of hazardous fluids so that no hazards arise for people or the environment.



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Before all work, ensure that existing drives are voltage-free and pressure-free.
2. Securely prevent restarting during all work.



WARNING

Unshielded gearwheels!

Gearwheels can trap and crush fingers and hands.

1. Do not engage gearwheels.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Depressurise the device and all connection lines before doing any work.
2. Securely prevent the restoration of pressure while working on the device.



CAUTION

Hot surfaces!

Burn injury to skin if touched.

1. At temperatures $\geq 48^{\circ}\text{C}$ the device must be allowed to cool down first.

**NOTICE****Blocking of the device through hardening medium**

Hardening medium can mechanically jam the device and make it unusable.

1. Clean device immediately after operating with a hardening medium.

8.2 Removal

- Depressurise and de-energize the system.
- Close existing shut-off elements upstream and downstream of the device.
- Open existing drain elements and loosen connection lines. Collect and dispose of discharging medium so that no hazard arises for persons or environment.
- Dismantle the device.
- Clean the device.
- Close the device connections and lines to prevent dirt penetration.

9 Maintenance

9.1 Safety instructions for maintenance



DANGER

Hazardous fluids!

Danger of death when handling hazardous fluids.

1. Comply with the safety data sheets and regulations on handling hazardous fluids.
2. Collect and dispose of hazardous fluids so that no hazards arise for people or the environment.



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Before all work, ensure that existing drives are voltage-free and pressure-free.
2. Securely prevent restarting during all work.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Depressurise the device and all connection lines before doing any work.
2. Securely prevent the restoration of pressure while working on the device.



CAUTION

Hot surfaces!

Burn injury to skin if touched.

1. At temperatures $\geq 48^{\circ}\text{C}$ the device must be allowed to cool down first.

9.2 Maintenance work



Checking and documentation of the operating data

Regular checking and documentation of all operating data such as pressure, temperature, current consumption, degree of filter soiling, etc. contributes to early problem detection.

- Perform maintenance according to specification.
- Replace defective and worn components.
- If required, request spare parts lists and assembly drawings from the manufacturer.
- Document the type and scope of the maintenance work along with the operating data.
- Compare the operating data with the values of the first commissioning. Determine the cause in case of major non-compliances (> 10 %).
- Dispose of packing material and used parts in accordance with the local stipulations.



Barriers and instructions

All barriers and warning signs removed during this must be attached to their original position on completing maintenance and/or repairs.

9.3 Maintenance instructions

The following information provides recommendations on maintenance work and maintenance intervals for the device being used.

Depending on the actually occurring loads in operation, the type, scope and interval of the maintenance work can deviate from the recommendations. The equipment builder/operator shall write an obligatory maintenance plan.



Within the framework of preventive maintenance, it is appropriate to replace wear parts before reaching the wear limit.

With corresponding expertise and sufficient equipment, the replacement can be carried out by the equipment builder/operator. Please consult the manufacturer about this.



Warranty

In case of improper implementation, any warranty is voided.

Maintenance recommendations Gear pump			
Interval	Maintenance work	Employ-ees	Duration approx. [h]
Firstly: after max. 24 h	Inspection: Discharge flow	1	1
	Inspection: Operating pressure		
	Inspection: Fluid temperature		
	Inspection: Device temperature		
	Inspection: Add-on valve function (if existing)		
	Inspection: Check potential equalisation for firm seating and functionality (if existing)		
	Inspection: Condition of operating fluid		
Daily	Audiometric monitoring: Unusual noise	1	0.1
	Cleaning: Remove dust deposits and dirt with a moist cloth		
	Visual inspection: Leakages		
	Visual inspection: Filling level of liquid seal (if existing)		
3000 Operating hours	Inspection: Discharge flow	1	1
	Inspection: Operating pressure		
	Inspection: Fluid temperature		
	Inspection: Device temperature		
	Inspection: Add-on valve function (if existing)		
	Inspection: Check potential equalisation for firm seating and functionality (if existing)		
	Inspection: Condition of operating fluid		
6000 Operating hours	Visual inspection: Condition of gears	1	2
	Visual inspection: Condition of housing parts		
	Visual inspection: Condition of plain bearings		
	Visual inspection: Condition of shaft seal		
	Visual inspection: Condition of outboard bearings (if existing)		
As required	Replace: Plain bearings (only by manufacturer)	1	2
	Replace: Outboard bearing (if existing)		
	Replace: Shaft seal		
	Replace: Other seals		

10 Repairs

10.1 Safety instructions for repair



DANGER

Hazardous fluids!

Danger of death when handling hazardous fluids.

1. Comply with the safety data sheets and regulations on handling hazardous fluids.
2. Collect and dispose of hazardous fluids so that no hazards arise for people or the environment.



DANGER

Rotating parts!

Danger of death due to body parts, hair or clothing getting trapped or entangled.

1. Before all work, ensure that existing drives are voltage-free and pressure-free.
2. Securely prevent restarting during all work.



WARNING

Failure of load-carrying parts due to overload!

Danger of injury from flying parts.

Danger of injury from spurting fluids.

1. Depressurise the device and all connection lines before doing any work.
2. Securely prevent the restoration of pressure while working on the device.



CAUTION

Hot surfaces!

Burn injury to skin if touched.

1. At temperatures $\geq 48^{\circ}\text{C}$ the device must be allowed to cool down first.

10.2 General

The repairs covers:

1. Troubleshooting
Determination of damage, pinpointing and localisation of the damage cause.
2. Elimination of damage
Elimination of the primary causes and replacement or repair of defective components. The repair is generally made by the manufacturer.

Repairs by manufacturer

- Before returning the device, fill in the *return notification* form. The form can be filled in online and is available as a pdf file download.



Device contains hazardous material

If the device was operated with dangerous liquids, it must be cleaned before the return. If this should not be possible, the safety data sheet of the hazardous material is to be provided beforehand.

Repair by equipment builder/operator

If corresponding expertise and sufficient equipment is available, the equipment builder/operator can also make the repairs. Please consult the manufacturer about this.

- If required, request spare parts lists and assembly drawings from the manufacturer.
- Use spare parts approved by the manufacturer only.
- Dispose of packing material and used parts in accordance with the local stipulations.



Warranty

In case of improper implementation, any warranty is voided.



Barriers and instructions

All barriers and warning signs removed during this must be attached to their original position on completing maintenance and/or repairs.

10.3 Detecting and eliminating failures

Failure		Potential causes	Possible measures
1.1	Increased noise <i>Pump cavitation</i>	Excessive negative pressure (not complete filling of the pump)	Check suction line design Use noise-optimised pump
		Suction line plugged	Clean the suction line
		Suction filter plugged or too small	Clean suction filter or use a larger filter
			Replace filter element
		Suction basket plugged or too small	Clean intake strainer or dimension larger
		Fluid temperature too low	Adjust the temperature of medium
1.2	Increased noise <i>Foaming or air in medium</i>	Pump sucks air	Check oil level in the tank
			Check suction line
			Check the shaft seal
		Shaft seal defective	Replace shaft seal
		Suction connection leaking	Retighten or replace threaded connections
			Replace seals
		System not vented	Vent system
		Return line ends above the fluid level	Extend return line
1.3	Increased noise <i>Mechanical vibrations</i>	Incorrectly aligned and/or loose coupling	Correct the alignment of the coupling and secure the coupling halves
		Incorrectly and/or insufficient line fastening	Fixate lines with suitable fastening material (e.g. pipe clamps)
		Wobbling pressure relief valve (if existing)	Increase valve opening pressure
		Not a noise-reducing setup	Use dampers

Failure		Potential causes	Possible measures
2	Pump does not suck	Dry run	Fill pump and the suction line with medium.
		Minimum filling level in the supply tank undercut	Top up medium
		False direction of rotation of the pump	Correct the direction of rotation
		Closed shut-off element in the suction line	Open the shut-off element
		Suction line plugged	Clean the suction line
		The air in the suction line cannot be compressed in the pressure line	Reduce the start-up pressure
			Vent the pressure line
			Increase volume of the pressure line
		Speed of the pump is too low	Check the pump design
			During frequency inverter operation: Check the operation/line frequency
		Geodetic suction head too high	Check installation location
			Provide pre-filling pump

Failure		Potential causes	Possible measures
3	Insufficient pressure Insufficient pumping flow rate	Excessive negative pressure (not complete filling of the pump)	Check suction line design
		Viscosity too high	Provide pre-filling pump
		Speed of the pump is too low	Check the pump design
			During frequency inverter operation: Check the operation/line frequency
		Throttled shut-off element in the suction line	Open the shut-off element
		Suction line plugged	Clean the suction line
		Suction filter plugged or too small	Clean suction filter or use a larger filter
			Replace filter element
		Suction bascet plugged or too small	Clean intake strainer or dimension larger
		Constant triggering of pressure relief valve (if existing)	Increase valve opening pressure
		Pump sucks air	Check oil level in the tank
			Check suction line
			Check the shaft seal
		Wear	Replace the device
4	Excessive operating temperature	Cooling and heat dissipation insufficient	Increase the cooling capacity
		Not sufficient oil in the system	Check the container layout
		Excess fluid is being delivered into the supply tank via pressure relief valve under load	Check the pump design
5	Impermissible pump heating	Constant triggering of a directly attached pressure relief valve (if existing)	Increase valve opening pressure
		Pressure too high in association with a media viscosity that is too low	Check the system design
		Speed too fast in connection with media viscosity that is too high	Check the system design
		Gland lid overtightened (for gland seal)	Unscrew gland lid and readjust leakage
		Suction pressure too high	Reduce the pressure
		Wear	Replace the device

Failure		Potential causes	Possible measures
6	Leakages <i>Seal failure</i>	Poor maintenance	Comply with maintenance plan Replace seals
		Mechanical damage	Replace seals
		Thermal overload	Check the operating datas Replace seals
		Pressure too high	Check the operating datas Replace seals
		Gas content in medium too high	Check the operating datas Replace seals
		Corrosion/chemical impact	Check the material compatibility Replace seals
		Wrong direction of rotation	Correct the direction of rotation Replace seals
		Contaminated medium	Provide filtration Replace seals
		Gland lid not sufficiently tightened (for gland seal)	Retighten gland lid
		Loose threaded connections	Retighten or replace threaded connections
7.1	Coupling <i>Coupling wear</i>	Alignment error	Correct the alignment of the coupling and secure the coupling halves
		Spider overloaded	Check the operating datas Use harder spider
7.2	Coupling <i>Cam break</i>	Spider wear Torque transmission due to metal contact	Adapt maintenance intervals Replace coupling
7.3	Coupling <i>Premature spider wear</i>	Alignment error	Correct the alignment of the coupling and secure the coupling halves Replace spider
		Spider failure due to chemical corrosion	Check the material compatibility Replace spider

Failure		Potential causes	Possible measures
8	Motor protection switch tripped	Driving power too low	Check the drive design
		Motor incorrectly connected	Check motor connection
		Phase failure	Check feed/supply
		Current consumption too high	Check the operating datas
			Check direction of rotation
		Motor circuit breaker incorrectly designed	Check the operating datas
Consult the manufacturer for all unidentifiable failures.			