


# General information

## Cavity

Type series: Cavity C1040

Dimensions and sectional view

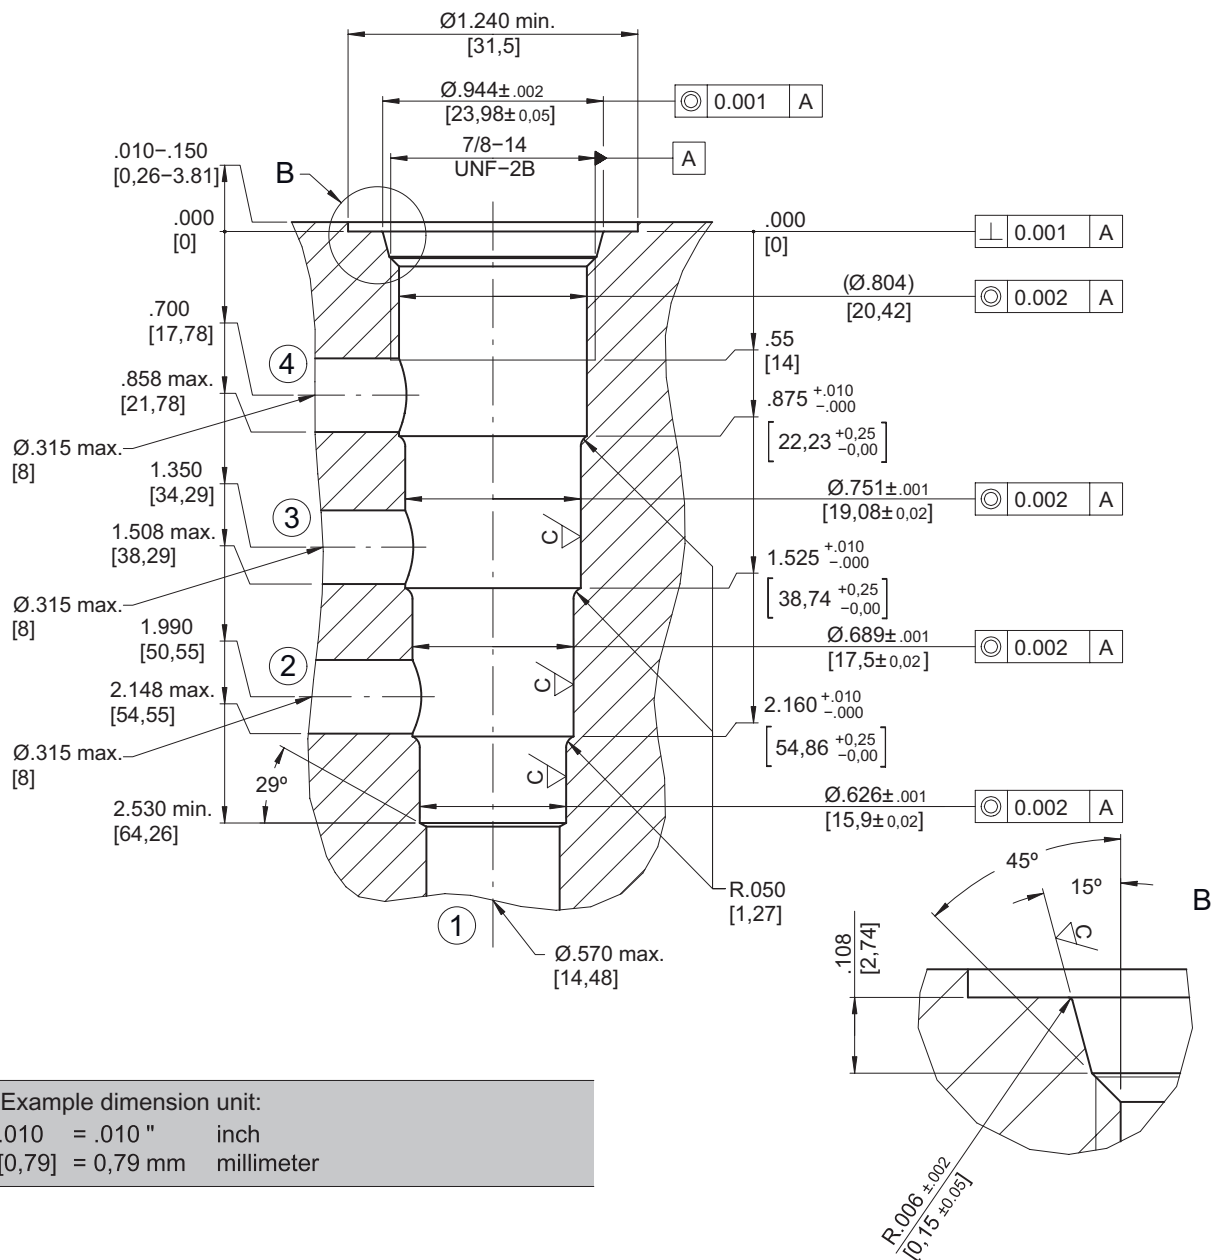

Example dimension unit:  
 .010 = .010" inch  
 [0,79] = 0,79 mm millimeter

Dimension Tolerances	
Unless otherwise specified	
0.000	± .005"
0.00	± .010"
Angles	± 1/2°

Surface roughness		
	$\nabla$ C	$\nabla$ D
Ra	45 µin ( 1.15 µm )	125 µin ( 3.2 µm )
	$\nabla$ D	Unless otherwise specified

## Installation information



### **ATTENTION!**

You must maintain the specified positional and diametral tolerances. To ensure trouble-free operation of the screw-in cartridges, we strongly recommend that pilot drilling, boring, reaming and cavity thread-cutting are always performed in one setup.



### **NOTE!**

The cavity type C1040 complies with the standard according to ISO 17209: 7/8-04-0-13 and NFPA/T3.5.50: 0.875-04-0-09.



### **NOTE!**

We offer form toolsets for sale or hire. For further information, see data sheet 520-P-000050.